


## General Purpose ABS, POLYLAC<sup>®</sup> PA-756S

### Processing Conditions

- A. Pre-drying 80 ~ 85 °C x 2 ~ 4 hrs  
depending on a) Humidity  
b) Ratio of reground resin  
c) Storage conditions
- B. Barrel Setting Profile

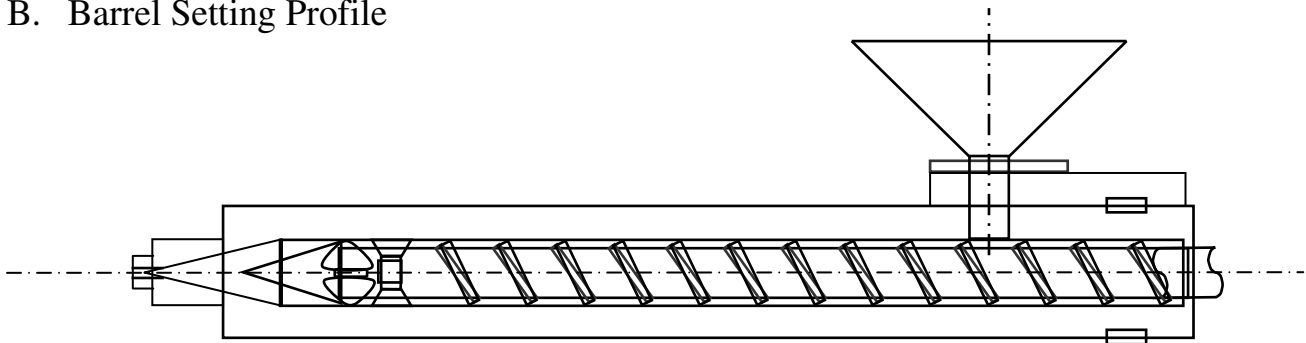

MAX(°C)	230	230	220
MIN (°C)	190	190	180

- C. Mold Temperature 30~70°C  
depending on a) Thickness  
b) Dimension  
c) Gate and runner system

#### NOTE :

1. Keep the resin from dust and contamination during handling and production.
2. Do not retain the hot melt at the barrel for a long time between injection cycles.
3. Temperature setting of manifold system should not exceed 240°C to avoid melt from degraded.
4. For further information, please contact your local agent or call via +886-6-2665555.