



PMMA, ACRYREX[®] CM-207


VIW

Processing Conditions

A Pre-drying 75~80 °C x 4 hrs

- depending on
- a) Humidity
 - b) Ratio of reground resin
 - c) Storage conditions

B. Barrel Setting Profile

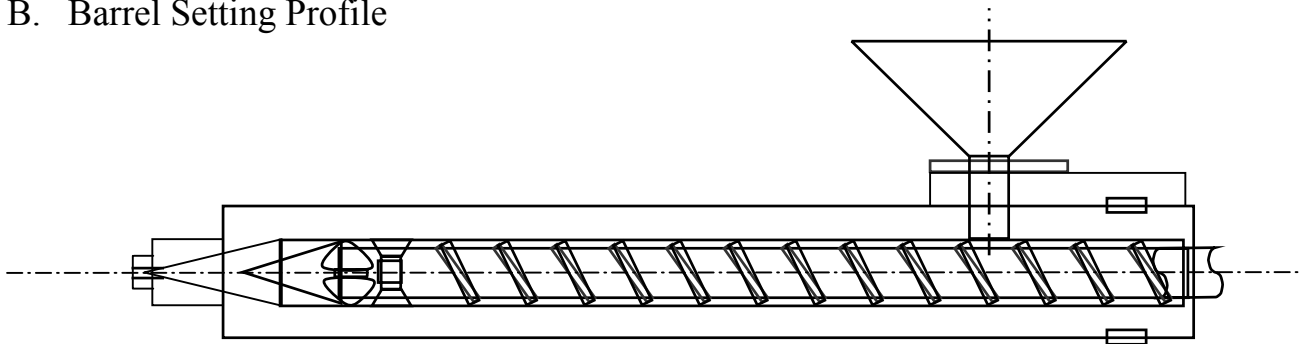

MAX(°C)	220	225	200
MIN(°C)	200	210	185

C. Mold Temperature 40~60 °C

- depending on
- a) Thickness
 - b) Dimension
 - c) Gate and runner system

NOTE :

1. Keep the resin from dust and contamination during handling and production.
2. Do not retain the hot melt at the barrel for a long time between injection cycles.
3. Temperature setting of manifold system should not exceed 230 °C to avoid melt from degradation.

For further information, please contact your local agent or fax to Chi Mei Technical Services Dept. at 886-6-2665555