



PMMA, ACRYREX[®] CM-211


August 15, 2006 VIW

Processing Conditions

A Pre-drying 70~75 °C x 4 hrs

- depending on
- a) Humidity
 - b) Ratio of reground resin
 - c) Storage conditions

B. Barrel Setting Profile

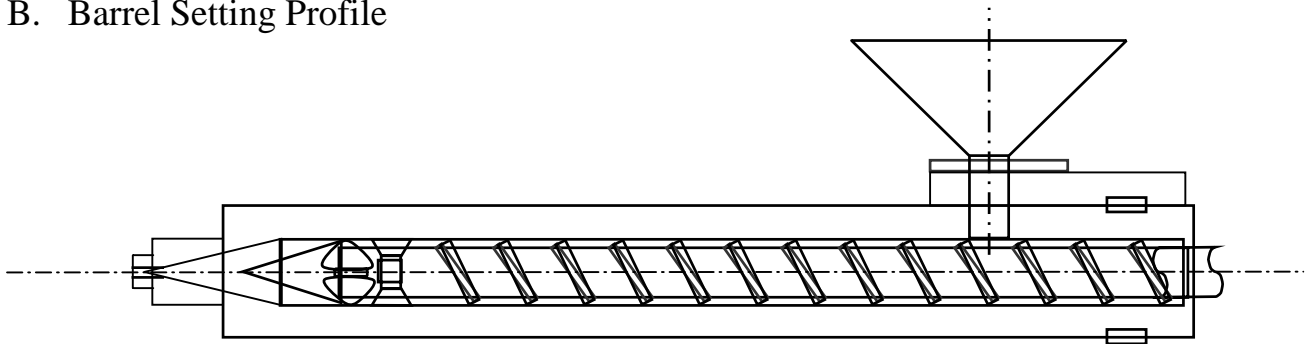

MAX(°C)	210	215	190
MIN(°C)	190	195	180

C. Mold Temperature 30~50 °C

- depending on
- a) Thickness
 - b) Dimension
 - c) Gate and runner system

NOTE :

1. Keep the resin from dust and contamination during handling and production.
2. Do not retain the hot melt at the barrel for a long time between injection cycles.
3. Temperature setting of manifold system should not exceed 220 °C to avoid melt from degrading.

For further information, please contact your local agent or fax to Chi Mei Technical Services Dept. at 886-6-2665555